
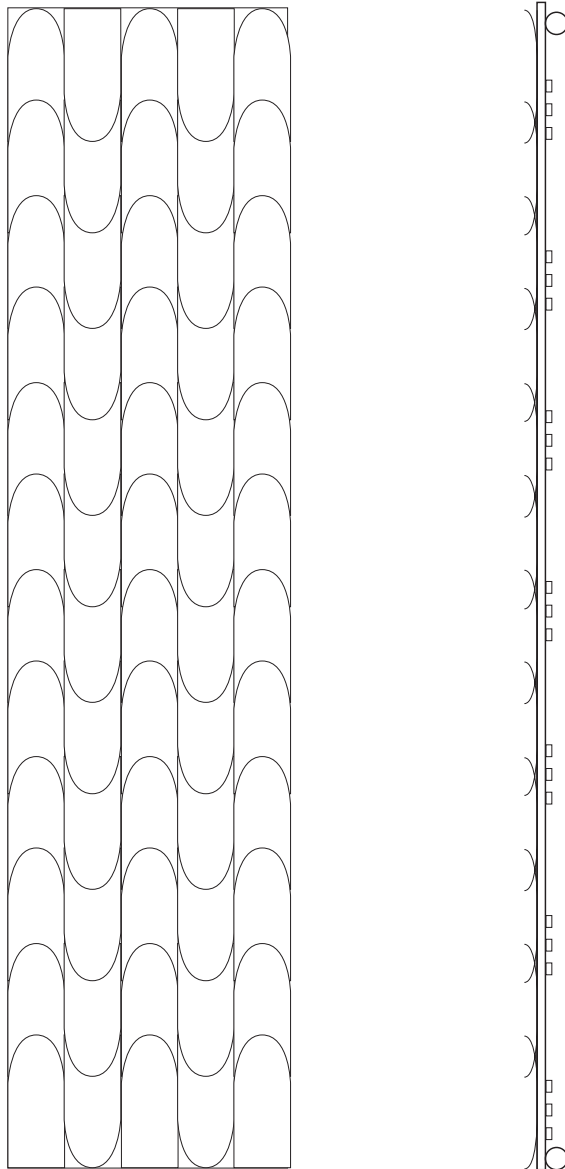


Skin

Supplied with 4 brackets - 2 for the top and 2 for the bottom.
Tubular radiator cloaked with high design panels

Pipe centres left to right = width of radiator plus valves
Pipe centres from wall = 47mm
Max depth from wall = 105mm

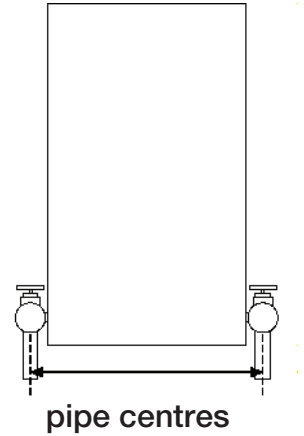

Important Note

The Radiator Company recommend that existing or new pipework is not adjusted until the radiator or towel rail is installed in its final position.