

[Specification](#)
[Fiche](#)
[Label](#)

Product Specification



Product Code: TRSMVI-0250LFC

Item Description: 250L STEL IND STD

C


Capacity	Brand	ERP Type	Item Category Code	Product Group Code	Model
250 L	STELFLOW	IndirectUnvented	Stainless	STELFLOW	INDIRECT

Product Specification

Actual capacity (Ltr)	250	Thermal insulation	DENSE PU FOAM
Unit weight empty (kg)	51	Cylinder material	LDX 2101
Unit weight full (kg)	296	Outer casing	COATED MILD STEEL
No immersions	1	Coil material	316L STAINLESS STEEL
Immersion spec	3KW@230V	Foam thickness	0
Max mains water pressure (Bar)	10	Operating temp (C)	60
Operating pressure (Bar)	7	Safety valve temp (C)	95
Tested to standard	BS EN 12897:2006	Warranty terms (Year)	25Y
No heat exchangers	1	Heat loss	1.76
Coil 1 rating (kW)	17.8	Coil 1 surface area (m ²)	.88
Coil 1 max prim pressure (Bar)	3.5	Coil 1 resistance (Bar)	.2

Dimensions

A - Height (mm)	1744
B - Diameter (mm)	550
C (mm)	195
D (mm)	595
E (mm)	635
F (mm)	700
G (mm)	1399
H (mm)	1499

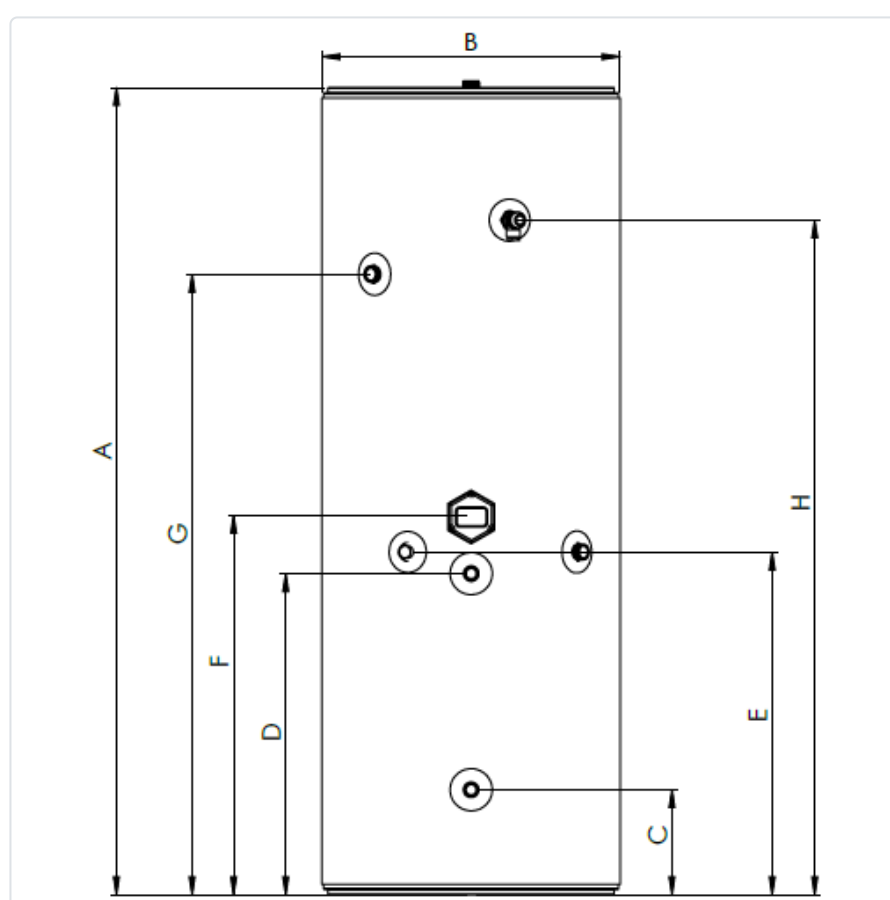

[Click or scan here to view the product page:](#)



<https://jouleuk.co.uk/products/stelflow-indirect/>

Test Standard: BS EN 12897:2006

Joule UK

4 Valencia Park, Gilcar Way,
Wakefield Europort
Castleford, West Yorkshire
WF105QS, UK

Joule Ireland

Unit 407 NW Business Park,
Cappagh Road, Ballycoolin,
Blanchardstown,
Dublin