


Technical Data Sheet



Tempest Direct Slimline

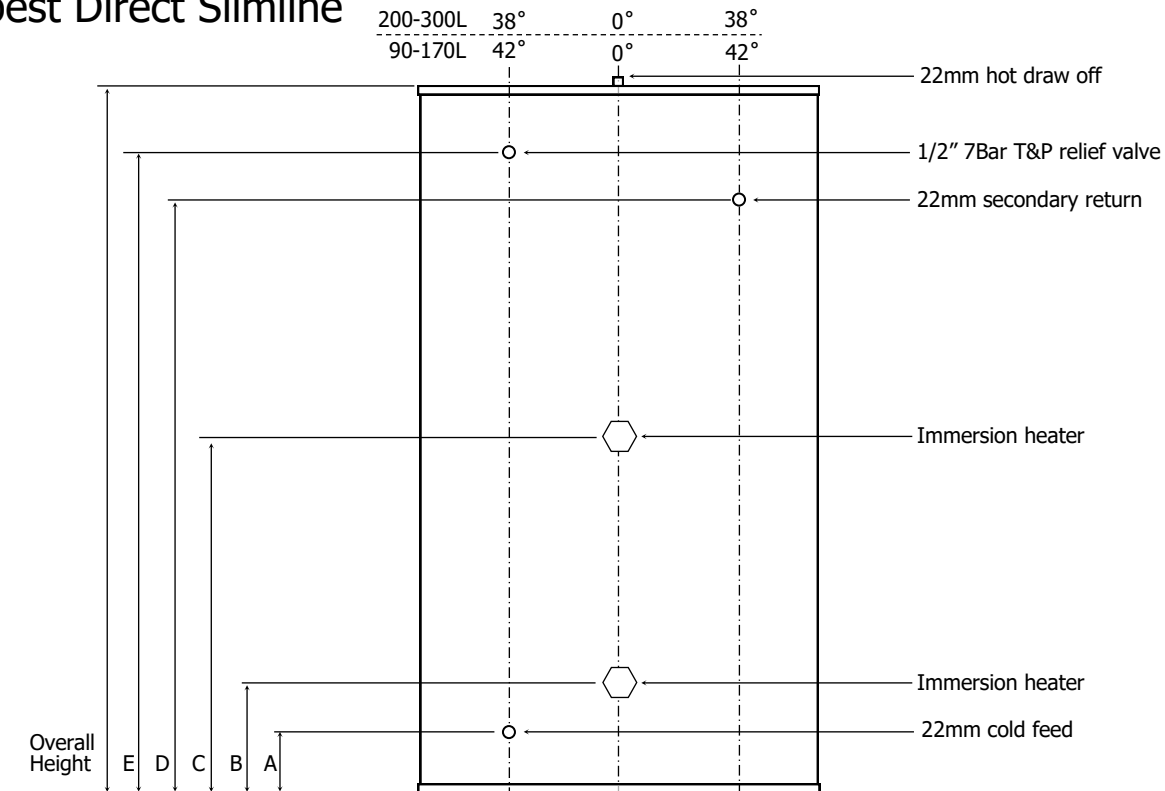

All unvented cylinders come with an unvented component kit to suit.

Capacity (L)	90	125	150	170	200	250
Height (mm)	900	1050	1200	1500	1800	1800
Diameter (mm)	470	470	470	470	470	510
A (mm)	155	155	155	155	155	165
B (mm)	185	185	185	185	185	195
C (mm)	480	480	585	585	585	815
D (mm)	n/a	n/a	n/a	n/a	1405	1465
E (mm)	710	860	1010	1305	1605	1615

Capacity (L)	90	125	150	170	200	250
Reheat from cold (minutes)	52	72	86	98	108	144
Reheat from 70% draw-off (minutes)	27	37	45	51	63	75
ERP Band	C	C	C	C	C	C
Immersion Rating (kw)	2 x 3	2 x 3	2 x 3	2 x 3	2 x 3	2 x 3
Standing Heat Loss (kwh/24hrs)	1.37	1.48	1.72	1.92	2.04	2.16



T: 01952 257961
F: 01952 253452

E: sales@telford-group.com
W: www.telford-group.com