

Wall mounted gas condensing boiler

VITODENS CLASSIC



Rated Excellent by our customers!

PRODUCT FEATURES

- + 24 and 28 kW models
- + Pre-commissioned
- + DHW output ratings of 5 to 28 kW
- + Heat output ratings of 5 to 25 kW
- + Pneumatic burner
- + 1:5 modulation range
- + Filling loop included
- + 10 year heat exchanger warranty




Easy operation



5 years standard
warranty

Wall mounted gas condensing boiler

VITODENS CLASSIC

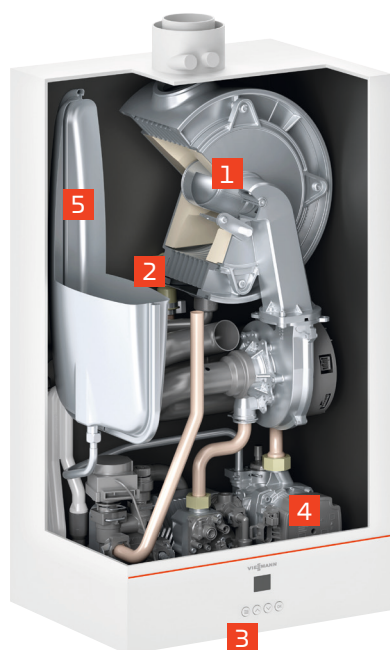

- 1** MatriX Plus burner with Pneumatic Combustion control
- 2** Inox-Radial heat exchanger
- 3** LED display with user-friendly touch buttons
- 4** High-efficiency pump
- 5** Expansion vessel (8 litres)



Easy operation



Compact dimensions



Durable and efficient



High DHW convenience



MatriX-Plus burner

Vitodens classic		Gas condensing combi boiler	
Boiler type		BPKB-24	BPKB-28
Rated heat output	50/30°C	5.0 - 20.0	5.0 - 25.0
	80/60°C	4.5 - 19.2	4.5 - 22.7
Rated output for DHW heating	kW	24	28
Dimensions			
Height	mm	700	700
Width	mm	400	400
Depth	mm	300	300
Weight	kg	34	34
Flue gas connection	Ø mm	60	60
Combustion air connection	Ø mm	100	100
DHW flow rate at 35°C temp rise	l/min	10	12
Energy efficiency class		< A	< A

Vitodens classic are tested and approved for natural gas only according to EN 15502.



Vitodens classic

Viessmann UK
Hortonwood 30
Telford
TF1 7YP
www.viessmann.co.uk
A Carrier Company